

Order from Allstrap 866-779-2673



Distributed By:

Allstrap

1719 Kenny Rd

Columbus, OH, 43212

A337
Manual sealless steel
strapping tool with MicroLock™







A337

Manual sealless steel strapping tool with MicroLock™

Strapping qualities	Uniflex and Ultraflex max. 1100 N/mm ² / 160'000 psi	
Strapping dimensions:	widths	9.5 – 20.0 mm / ³ / ₈ – ³ / ₄ "
	thicknesses	0.38 – 0.63 mm / .015 – .025"
Weights	4.45 kg / 9.8 lbs Normal-version 4.7 kg / 10.4 lbs TW-version	
Sealless joint	Fromm MicroLock™	
Average seal strength	approx. 80 %	
TW-version available	Torque wrench tensioning system	
Suspensions (optional)	Suspension for vertical and horizontal applications; has to be ordered separately Handle for horizontal applications; has to be ordered separately	

Security sealless joint: MicroLock™

Sketch shows MicroLock™ joint when straps are under tension			Sketch shows MicroLock™ joint when straps are loose or under no tension
The configuration of the strap cutting profile (marked in red) prevents the straps from unlocking			The configuration of the strap cutting profile (marked in red) prevents the straps from unlocking

If strap tension is lost during storage or shipment the MicroLock™ security sealless joint will not unlock!

Sealless joint

The consistency of the seal efficiency of the sealless joint is very high and as a general rule it is higher than joints using a separate seal.



The advantages

- the MicroLock™ sealless system guarantees a maximum of security of the sealless steel strapping joint against unlocking
- the tool can handle regular duty and high tensile steel strapping
- the tool can handle steel strapping up to a thickness of 0.64 mm/.025"
- thanks to the special tensioning system (free wheeling) no loss of strap tension
- the sealing mechanism is completely closed
- the adjustment of the cutting and sealing depth is simple
- the feed wheel and the die and cutter support are easy to change

Distributed By:

Allstrap

1719 Kenny Rd
Columbus, OH, 43212

Order from Allstrap 866-779-2673



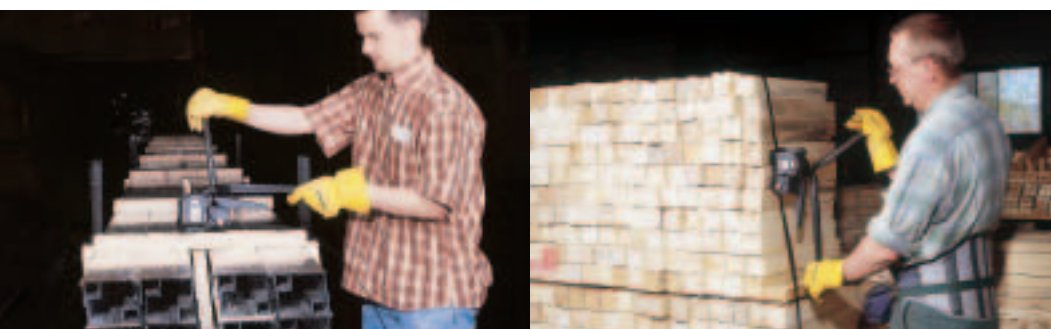
Adjustment

The cutting and sealing depth are very easy to adjust.



Special tensioning system

With the free wheeling system integrated in the tensioning lever not even the slightest strap tension is lost.



Applications

An ideal tool for a wide variety of standard, vertical and horizontal applications in practically all industries.

Distributed By:

Allstrap

1719 Kenny Rd
Columbus, OH, 43212

Chart of types Model A337

Item No.	Model	Uniflex and Ultraflex max. 1100 N/mm ² / 160'000 psi			
		Width		Thicknesses	
		mm	inch	mm	inch
13.1850	A337/9.5/0.38-0.50	9.5	3/8"	0.38 - 0.50	.015 - .020
13.1860	A337/10/0.38-0.50	10.0		0.38 - 0.50	.015 - .020
13.1870	A337/12.7/0.38-0.50	12.7	1/2"	0.38 - 0.50	.015 - .020
13.1872	A337/12.7/0.50-0.63	12.7	1/2"	0.50 - 0.63	.020 - .025
13.1880	A337/13/0.38-0.50	13.0		0.38 - 0.50	.015 - .020
13.1882	A337/13/0.50-0.63	13.0		0.50 - 0.63	.020 - .025
13.1890	A337/16/0.38-0.50	16.0	5/8"	0.38 - 0.50	.015 - .020
13.1892	A337/16/0.50-0.63	16.0	5/8"	0.50 - 0.63	.020 - .025
13.1910	A337/19/0.38-0.50	19.0	3/4"	0.38 - 0.50	.015 - .020
13.1912	A337/19/0.50-0.63	19.0	3/4"	0.50 - 0.63	.020 - .025
13.1920	A337/20/0.38-0.50	20.0		0.38 - 0.50	.015 - .020
13.1922	A337/20/0.50-0.63	20.0		0.50 - 0.63	.020 - .025

Uniflex = Regular duty max. 850 N/mm² / 123'000 psi

Ultraflex = High tensile strapping max. 1100 N/mm² / 160'000 psi

Chart of types Model A337 with torque wrench tensioning system

Item No.	Model	Uniflex and Ultraflex max. 1100 N/mm ² / 160'000 psi			
		Width		Thicknesses	
		mm	inch	mm	inch
13.1851	A337/9.5/0.38-0.50/TW	9.5	3/8"	0.38 - 0.50	.015 - .020
13.1861	A337/10/0.38-0.50/TW	10.0		0.38 - 0.50	.015 - .020
13.1871	A337/12.7/0.38-0.50/TW	12.7	1/2"	0.38 - 0.50	.015 - .020
13.1873	A337/12.7/0.50-0.63/TW	12.7	1/2"	0.50 - 0.63	.020 - .025
13.1881	A337/13/0.38-0.50/TW	13.0		0.38 - 0.50	.015 - .020
13.1883	A337/13/0.50-0.63/TW	13.0		0.50 - 0.63	.020 - .025
13.1891	A337/16/0.38-0.50/TW	16.0	5/8"	0.38 - 0.50	.015 - .020
13.1893	A337/16/0.50-0.63/TW	16.0	5/8"	0.50 - 0.63	.020 - .025
13.1911	A337/19/0.38-0.50/TW	19.0	3/4"	0.38 - 0.50	.015 - .020
13.1913	A337/19/0.50-0.63/TW	19.0	3/4"	0.50 - 0.63	.020 - .025
13.1921	A337/20/0.38-0.50/TW	20.0		0.38 - 0.50	.015 - .020
13.1923	A337/20/0.50-0.63/TW	20.0		0.50 - 0.63	.020 - .025

Uniflex = Regular duty max. 850 N/mm² / 123'000 psi

Ultraflex = High tensile strapping max. 1100 N/mm² / 160'000 psi

TW = Torque wrench tensioning system

Accessories

Item. No.	Description
A33.0121	Suspension for vertical and horizontal application
A33.0122	Handle for horizontal applications

Distributed By:

Allstrap

1719 Kenny Rd
Columbus, OH, 43212