

Order from Allstrap 866-779-2673




Distributed By:

**Allstrap**

1719 Kenny Rd  
Columbus, OH, 43212

**A3H**

***Pneumatic sealless steel strapping tool***

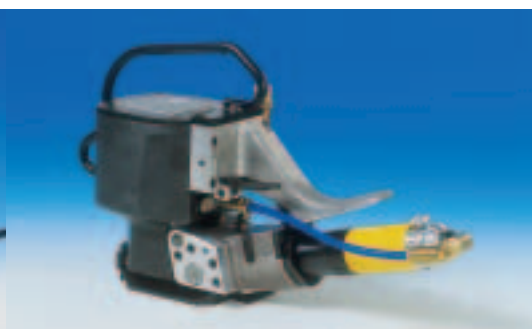

## A3H

### Pneumatic sealless steel strapping tool

Strapping quality	Uniflex regular duty strapping max. 850 N/mm <sup>2</sup> / 123'000 psi	
Strapping dimensions:	widths	9.5 – 20.0 mm / $\frac{3}{8}$ – $\frac{3}{4}$ "
	thicknesses	0.38 – 0.60 mm / .015 - .024"
Weights	8.5 kg / 18.7 lbs without suspension 8.9 kg / 19.6 lbs with suspension	
Average seal strength	approx. 80 %	
Strap tension	the tool is available for two different stages of strap tension	
Suspensions (optional)	Suspension bracket for standard- and vertical application is supplied with the tool Suspension bracket for standard- and horizontal application; has to be ordered separately, see accessories Universal suspension bracket; has to be ordered separately, see accessories	

Distributed By:

**Allstrap**

1719 Kenny Rd

Columbus, OH, 43212

#### Sealless joint

**The consistency of the seal efficiency of the sealless joint is very high and as a general rule it is higher than joints using a separate seal.**

**Cost savings around 10 % of the overall strapping costs can be achieved by the use of sealless strapping tools.**




#### The advantages

- simple operation – suitable for strapping of flat packages; reliable, rugged and service friendly
- air-power allows faster and higher strap tension; easy simultaneous loading of both straps
- pneumatic tensioning guarantees even tension of all straps applied
- the sealless joint reduces the overall strapping costs by approx. 10 % through the elimination of the seals
- thanks to the limited size of the base plate small items may be strapped without any problem
- the tool is compact and limited in weight and thus very suitable for a wide variety of applications



**Operation levers**  
The ergonomically arranged  
tensioning button and  
sealing lever allow a very  
efficient operation.

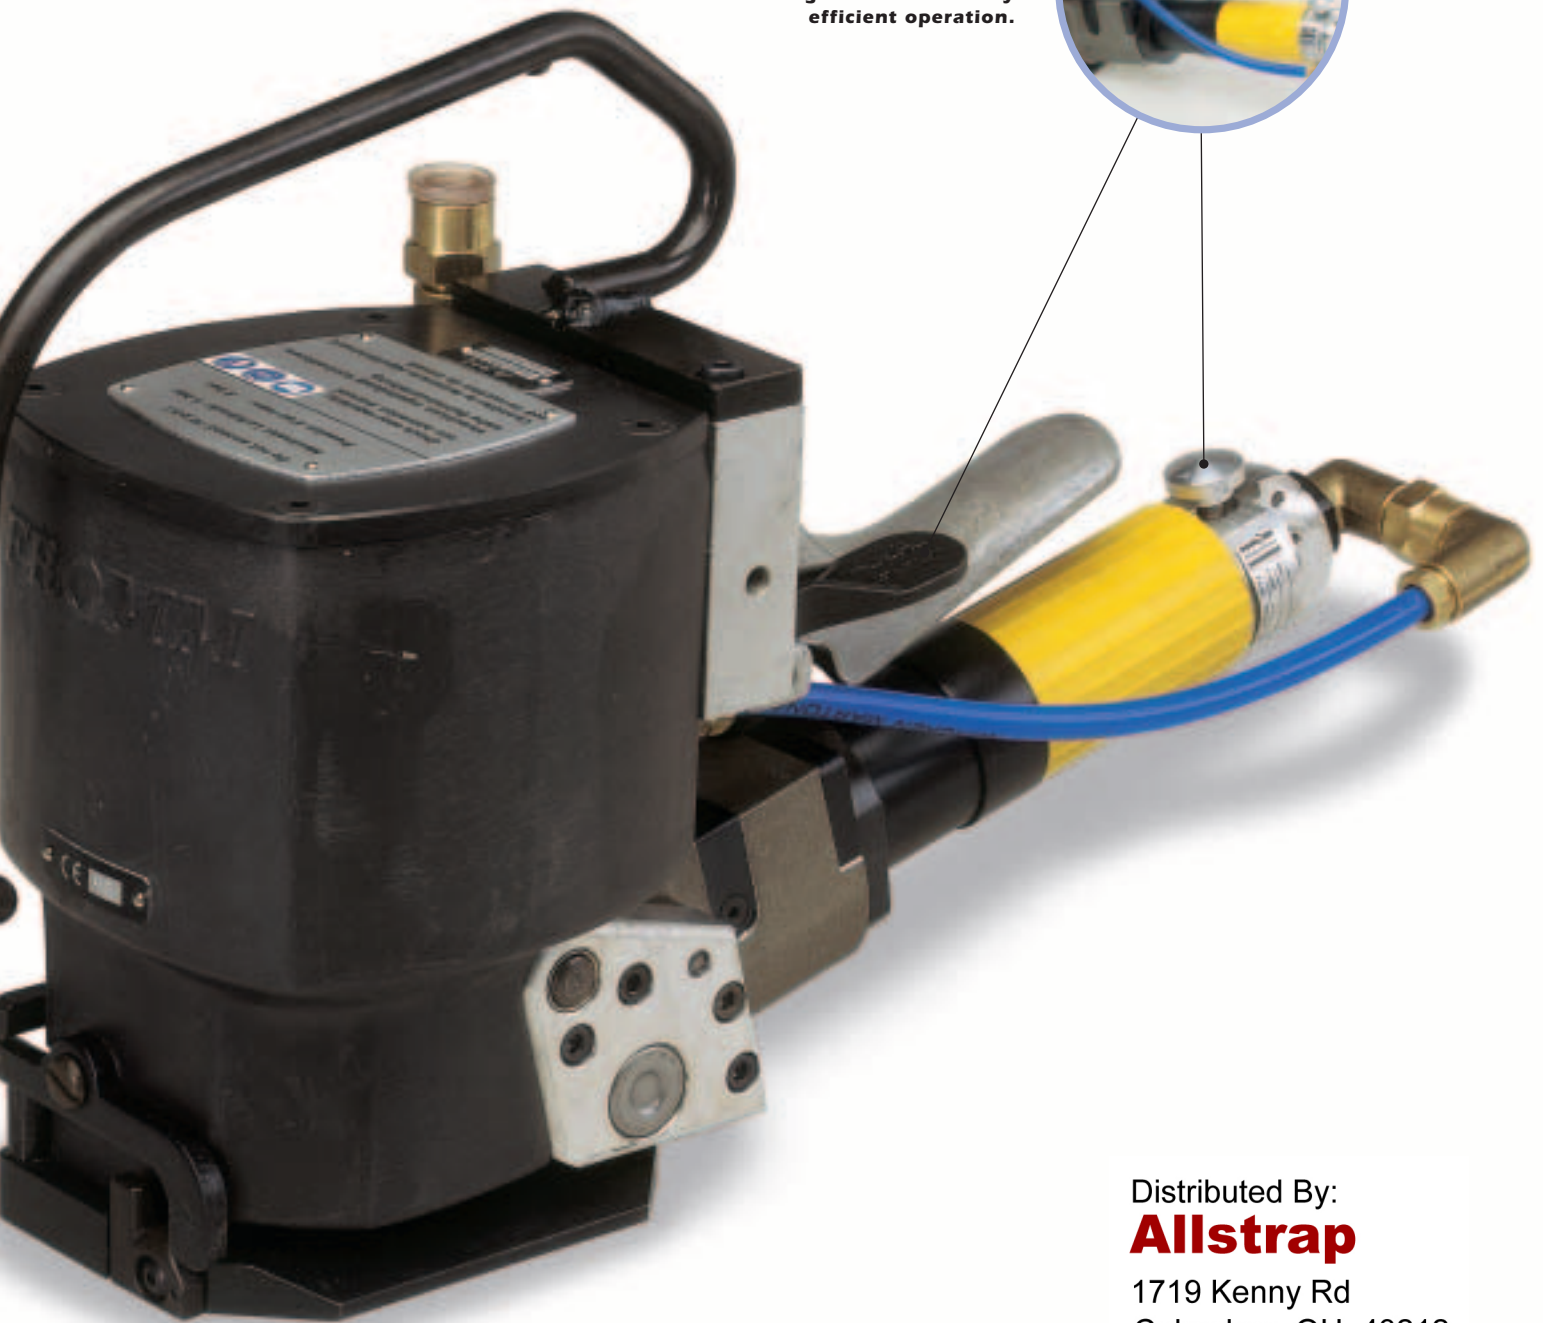

Distributed By:

**Allstrap**

1719 Kenny Rd

Columbus, OH, 43212

**Applications**

The ideal strapping tool  
for a wide variety of  
standard-, vertical- and  
horizontal applications in  
many industries.



**Typentabelle Modell A3H**

Item No.	Model	Uniflex max. 850 N/mm <sup>2</sup> 123'000 psi				Tension		Tension speed	
		Width		Thicknesses		N	lbs	mm/s	inch/s
		mm	inch	mm	inch				
13.6052	A3H/9.5/0.38-0.60/2.5	9.5	3/8"	0.38 - 0.60	.015 - .024	2500	560	170	6.7
13.6056	A3H/9.5/0.38-0.60/2.5/D	9.5	3/8"	0.38 - 0.60	.015 - .024	2500	560	170	6.7
13.6062	A3H/10/0.38-0.60/2.5	10.0		0.38 - 0.60	.015 - .024	2500	560	170	6.7
13.6066	A3H/10/0.38-0.60/2.5/D	10.0		0.38 - 0.60	.015 - .024	2500	560	170	6.7
13.6070	A3H/12.7/0.38-0.60/4.5	12.7	1/2"	0.38 - 0.60	.015 - .024	4500	1010	100	4.0
13.6072	A3H/12.7/0.38-0.60/2.5	12.7	1/2"	0.38 - 0.60	.015 - .024	2500	560	170	6.7
13.6074	A3H/12.7/0.38-0.60/4.5/D	12.7	1/2"	0.38 - 0.60	.015 - .024	4500	1010	100	4.0
13.6076	A3H/12.7/0.38-0.60/2.5/D	12.7	1/2"	0.38 - 0.60	.015 - .024	2500	560	170	6.7
13.6080	A3H/13/0.38-0.60/4.5	13.0		0.38 - 0.60	.015 - .024	4500	1010	100	4.0
13.6082	A3H/13/0.38-0.60/2.5	13.0		0.38 - 0.60	.015 - .024	2500	560	170	6.7
13.6084	A3H/13/0.38-0.60/4.5/D	13.0		0.38 - 0.60	.015 - .024	4500	1010	100	4.0
13.6086	A3H/13/0.38-0.60/2.5/D	13.0		0.38 - 0.60	.015 - .024	2500	560	170	6.7
13.6090	A3H/16/0.38-0.60/4.5	16.0	5/8"	0.38 - 0.60	.015 - .024	4500	1010	100	4.0
13.6092	A3H/16/0.38-0.60/2.5	16.0	5/8"	0.38 - 0.60	.015 - .024	2500	560	170	6.7
13.6094	A3H/16/0.38-0.60/4.5/D	16.0	5/8"	0.38 - 0.60	.015 - .024	4500	1010	100	4.0
13.6096	A3H/16/0.38-0.60/2.5/D	16.0	5/8"	0.38 - 0.60	.015 - .024	2500	560	170	6.7
13.6110	A3H/19/0.38-0.60/4.5	19.0	3/4"	0.38 - 0.60	.015 - .024	4500	1010	100	4.0
13.6112	A3H/19/0.38-0.60/2.5	19.0	3/4"	0.38 - 0.60	.015 - .024	2500	560	170	6.7
13.6114	A3H/19/0.38-0.60/4.5/D	19.0	3/4"	0.38 - 0.60	.015 - .024	4500	1010	100	4.0
13.6116	A3H/19/0.38-0.60/2.5/D	19.0	3/4"	0.38 - 0.60	.015 - .024	2500	560	170	6.7
13.6130	A3H/20/0.38-0.60/4.5	20.0		0.38 - 0.60	.015 - .024	4500	1010	100	4.0
13.6134	A3H/20/0.38-0.60/4.5/D	20.0		0.38 - 0.60	.015 - .024	4500	1010	100	4.0

Uniflex = Regular duty strapping max. 850 N/mm<sup>2</sup> /123'000 psi

D = Throttle valve (infinitely variable of the air pressure)

**Accessories**

Item No.	Description
A3H.1811	Suspension for standard- and horizontal application
A3H.1812	Universal suspension for standard-, vertical- and horizontal application (for horizontal applications the suspension position has to be changed manually)

Distributed By:

**Allstrap**1719 Kenny Rd  
Columbus, OH, 43212