

# NEW



**BUY AT ALLSTRAP (866) 779-2673**

 M. J. MAILLIS GROUP

## ST-POLI 10-19 LT

**PNEUMATIC STRAPPING TOOL FOR PET/PP**



- State of the art technology
- Lightweight and compact
- Ergonomic and elegant design
- Easy, one handed operation
- Highest tension capability
- Reliable and durable for heavy applications and continuous operation
- Accepts strap from 9 to 19 mm wide and from 0,4 to 1 mm thick.

# ST-POLI 10-19 LT

## PNEUMATIC STRAPPING TOOL FOR PET/PP


Technical data	
Strap quality	PP/PET
Joint type	friction weld seal
Package type	flat
Strap width	10-13-16-19 mm / 3/8"- 1/2"- 5/8"- 3/4"
Strap thickness	0,4-1,0 mm. / .015" - .040"
Max tension	1.500 N / 153 kg
Max tension speed	11 m/min
Air pressure	6/7 bar / 85 -100 PSI
Air consumption for tensioning	9 lt/sec
Air consumption for welding	12 lt/sec
Weight	4,50 kg / 9.9 lbs

www.gripa.it (Cristello B. - Mi)

Chart of types		
MODEL	ITEM.NO.	STRAP WIDTH
ST-POLI10LT	109.100.310	10-11 mm. 3/8"
ST-POLI13LT	109.130.310	12-13 mm. 1/2"
ST-POLI16LT	109.160.310	16 mm. 5/8"
ST-POLI19LT	109.190.310	19 mm. 3/4"

### FEATURES AND BENEFITS

- ST-POLI 10-19 LT, is a pneumatic plastic strapping tool for friction (sealless ) welds. Providing a maximum tension of 1,500 N.
- New State of the Art Technology, ST-POLI 10-19 LT, is a New Generation Tool, a major breakthrough in strapping a applications. Weighing only 4,50 kg, it is designed to provide the highest level of tension required for heavy duty polyester strap.
- Accepts larger variety of strap sizes. Quick tool set up for different width straps.
- Easily accessible adjustment for tension and welding.
- Head and rear guides ensure perfect strap alignment.
- Maintenance is simple and fast, reducing tool downtime.
- Friction weld system guarantee a high seal joint efficiency.

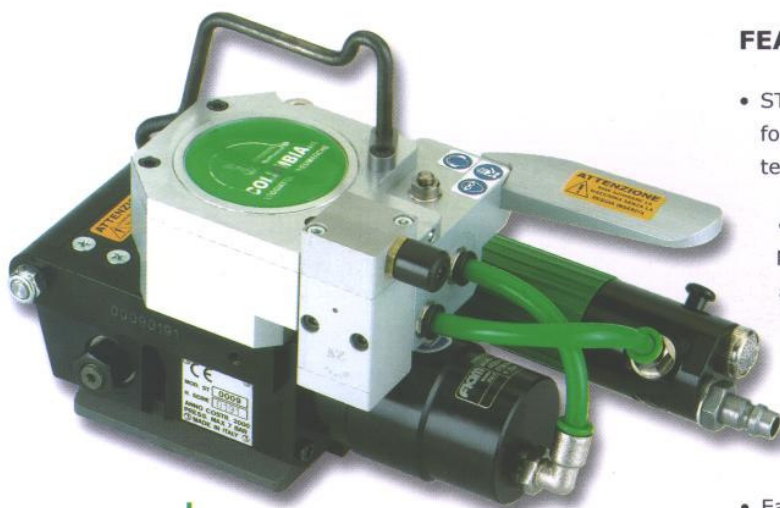

M. J. MAILLIS GROUP

**BUY AT ALLSTRAP**  
**(866) 779-2673**