


**PNEUMATIC STRAPPING TOOL WITH FRICTION WELD SEAL FOR PLASTIC
(PET / PP) STRAP — FLAT AND ROUND SURFACE—**

TECHICAL DATA / APPLICATIONS:

Only for welding strapping tool. Compact, easy and versatile. This tool friction welds, then cuts the strap. Available in four strap sizes: 3/8"(10mm), 1/2"(13mm), 5/8"(16mm) and 3/4"(19mm).

Package type	Flat and Round. Suitable for strapping fiber bales using press system
Strap type	PET / PP
Strap width	From 3/8" to 3/4" (10mm-19mm)
Strap thickness	From .020 to .050 (0.4mm-1.3mm) Optional .060 (1.5 mm)
Air pressure	From 80 psi (5.5 bar) to a 95 psi (6.5 bar)
Joint type	Friction Weld Seal
Weight	Around 5.1 lbs. (2.3 Kg)
Order Code: ST POLI WELDS / CUTS	124.160.040


- EASY TO USE
- ERGONOMIC
- MODERN DESIGN
- COMPACT
- LIGHT WEIGHT
- INSERT BOTH STRAPS TOGETHER

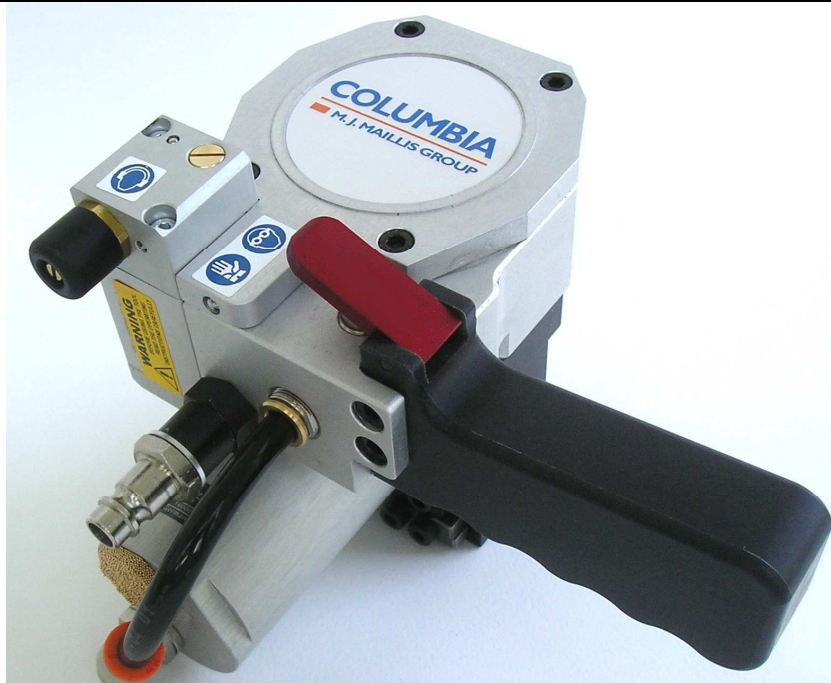

Manufactured by the M.J. Maillis Group

Buy at Allstrap (866) 779-2673



- EASY AND FAST ADJUSTMENTS -

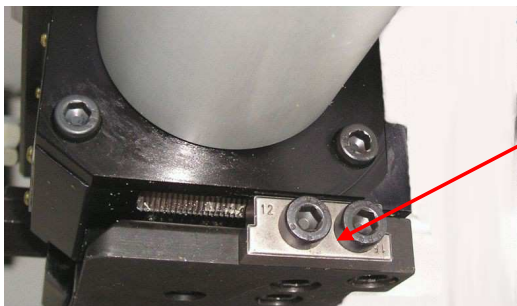

**UNIVERSAL STRAP GUIDE
OCCOMIDATES DIFFERENT
SIZE STRAP**

**LEVER RED - WELDING AND CUTTING
(OPTIONAL):
PUSH TO START WELDING AND CUTTING
(OPTIONAL)**

**TURN THIS SCREW TO ADJUST THE
WELDING TIMER**

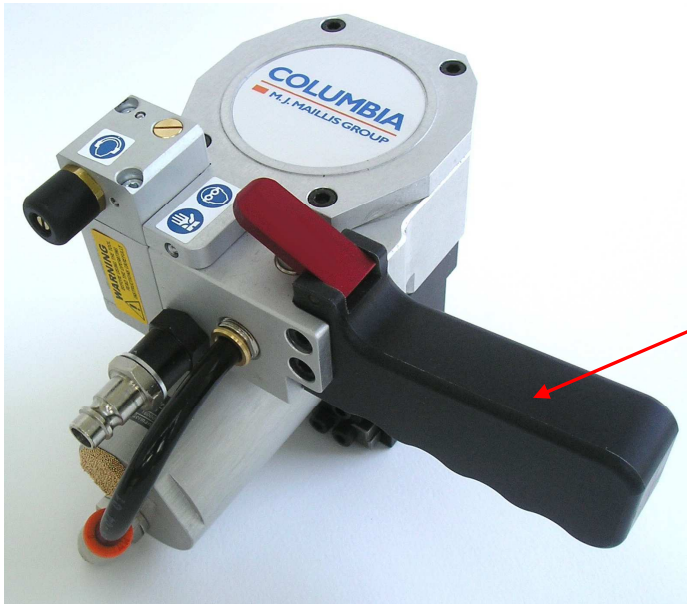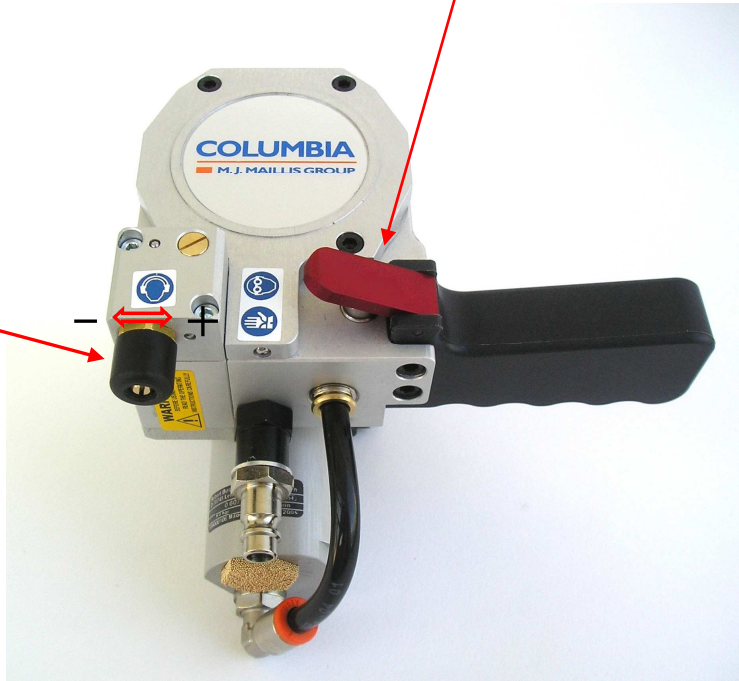

ERGONOMIC HANDLE

Buy at Allstrap (866) 779-2673

- TYPICAL APPLICATIONS -



I
S
N
T
S
R
E
A
R
P
T




W
C
E
U
L
T
D
I
N
G

AFTER THE WELDING CYCLE COMPLETES - WAIT 2 SECONDS PRIOR TO REMOVING THE STRAP FROM THE TOOL



STRAPPING FIBER BALES USING PRESS SYSTEM

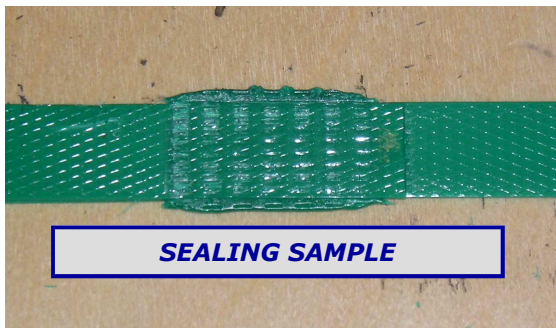

SEALING SAMPLE

Buy at Allstrap (866) 779-2673

