


Pneumatic sealless plastic strapping tools for heavy strapping

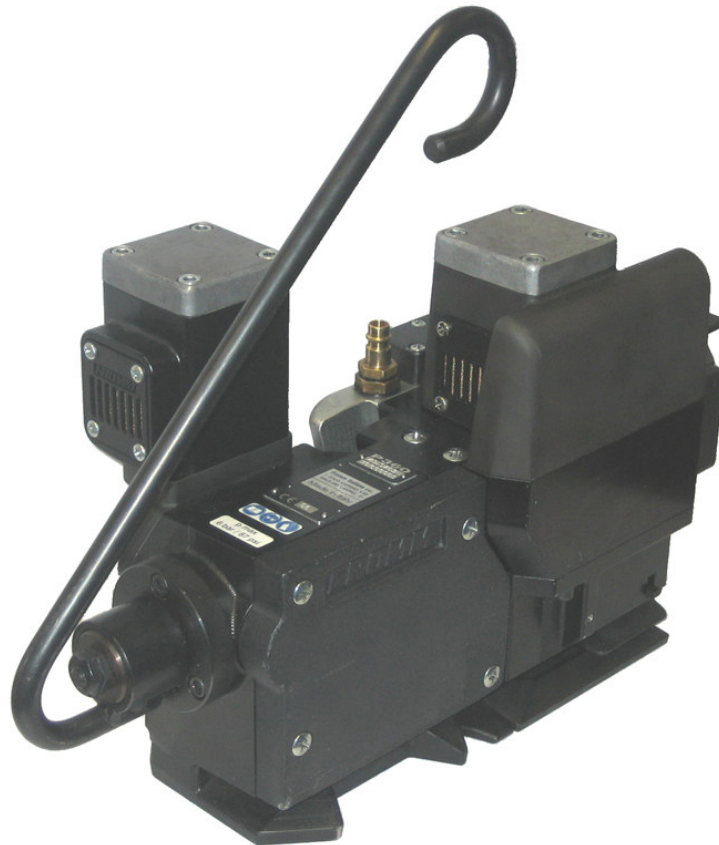

Characteristics

Strapping qualities:	Polyester (PET)	
Strapping dimensions:	widths	19.0 – 32.0 mm / 3/4 – 1 1/4"
	thicknesses	0.40 – 1.53 mm / .016 – .060"
Weight incl. bracket:	18.5 kg / 40.8 lbs	
Dimension with bracket:	L490 x W166 x H338 mm / 19.3" x 6.5" x 13.3"	
Average seal strength:	up to 75% (dependent on strap quality)	
Type of seal:	Friction weld sealing	
Strap tension:	2200 – 4000 N / 495 – 900 lbs (adjustable) or	
	3800 – 7000 N / 855 – 1570 lbs (adjustable)	
Tensioning speed:	270 mm/s / 10.6 inch/s or	
	150 mm/s / 5.9 inch/s	
Max. air pressure:	6.0 bar / 87 psi	

Suspension bracket supplied with the tool

Distributed By:
Allstrap

1719 Kenny Rd
Columbus, OH, 43212

Advantages

- High tension force up to 7000N
- Ideal for heavy duty applications with strapping dimensions of 19 to 32 mm and a thickness up to 1.53 mm
- The rugged tool is particularly suitable for continuous operation under the most demanding conditions
- Pneumatically powered and very reliable and service friendly
- The strap tension can be adjusted individually using the adjustment system – thus the package is secured with a perfectly tensioned strap
- The sealing time is set individually for a specific strap quality and thickness and a high seal strength is assured

Chart of types model P360

Item No.	Model	Strap widths		Strap thicknesses		Max. Tension		Tension speed	
		mm	inch	mm	inch	N	lbs	mm/sec.	inch/sec.
49.0405	P360/19/0.80-1.35/7.0	19	3/4	0.80-1.15	.031-.053	7000	1570	150	5.9
49.0407	P360/19/1.53/7.0	19	3/4	1.53	.060	7000	1570	150	5.9
49.0411	P360/25/0.40-0.59/4.0	25	1	0.40-0.59	.016-.023	4000	900	270	10.6
49.0413	P360/25/0.60-0.75/7.0	25	1	0.60-0.75	.024-.030	7000	1570	150	5.9
49.0415	P360/25/0.80-1.35/7.0	25	1	0.80-1.35	.031-.053	7000	1570	150	5.9
49.0421	P360/32/0.40-0.59/4.0	32	1 ¼	0.40-0.59	.016 -.023	4000	900	270	10.6
49.0423	P360/32/0.60-0.75/7.0	32	1 ¼	0.60-0.75	.024-.030	7000	1570	150	5.9
49.0425	P360/32/0.80-1.35/7.0	32	1 ¼	0.80-1.35	.031 -.03	7000	1570	150	5.9

Distributed By:

Allstrap

 1719 Kenny Rd
 Columbus, OH, 43212