


# P360

Pneumatic plastic strapping tool  
for heavy strapping applications

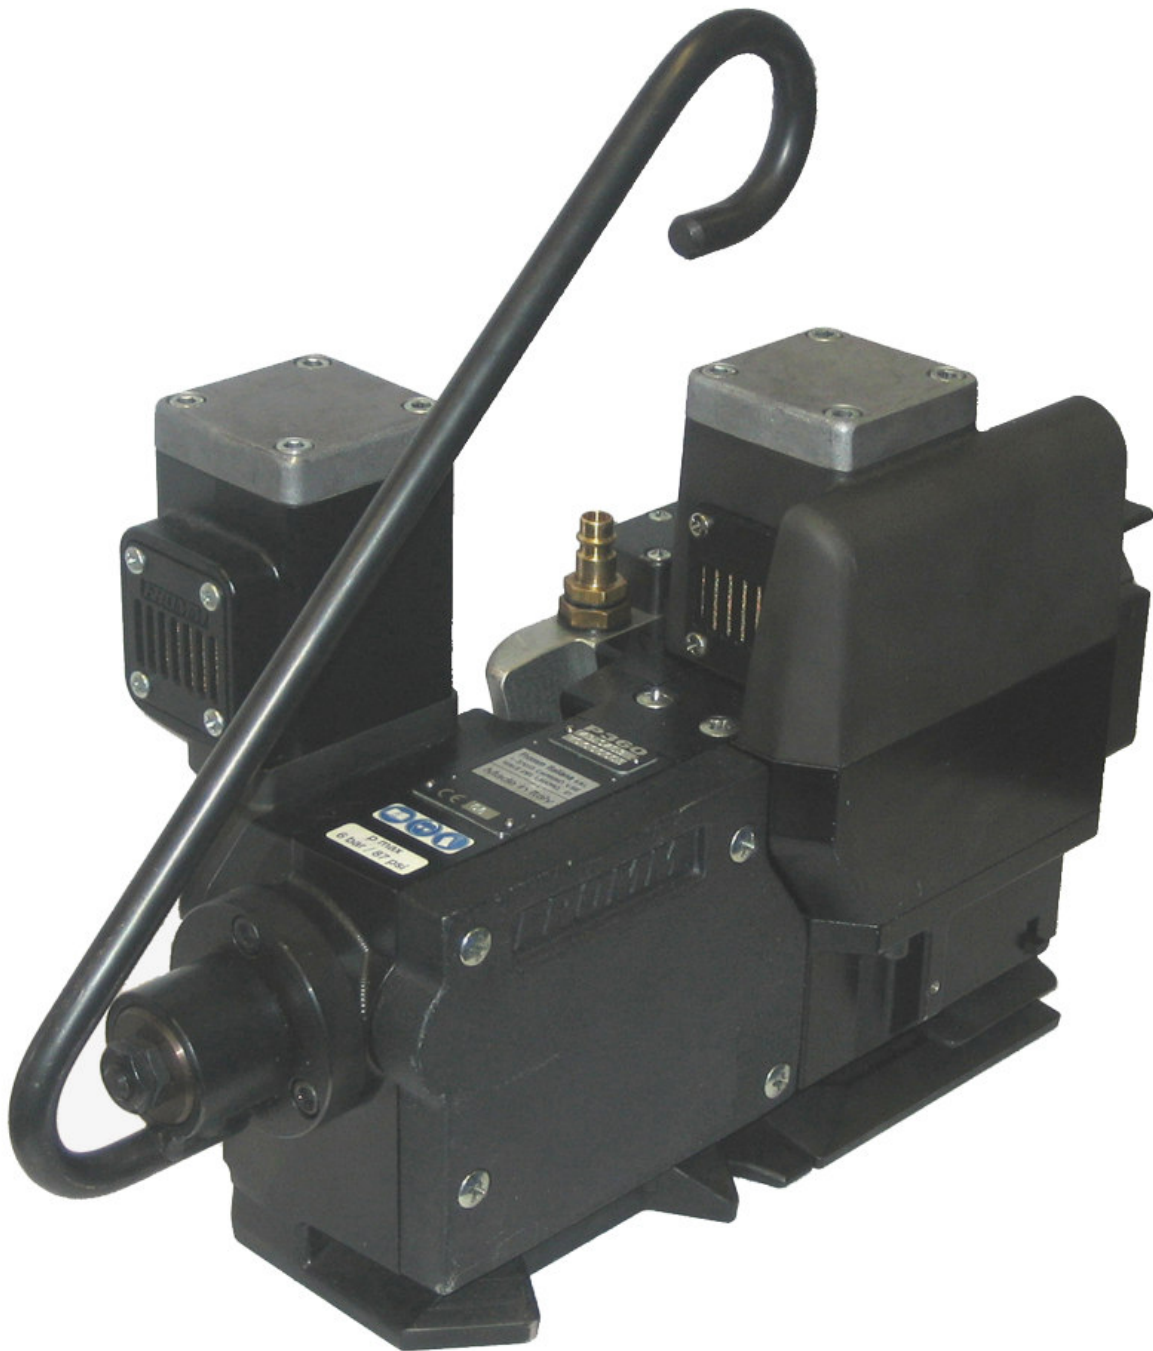


The latest tool suitable for strapping  
dimensions up to 32 mm / 1 1/4".

Distributed By:  
**Allstrap**  
1719 Kenny Rd  
Columbus, OH, 43212

## P360

### Pneumatic sealless plastic strapping tools for heavy strapping applications

Based on the successful model P350 the new tool will also be suitable for heavy strap thicknesses up to 1.35 mm / .053" (19 mm: up to 1.53 mm / 3/4"; up to .060") and allows impressive high tension forces up to 7000 N / 1570 lbs. With this tool converting heavy steel strapping to PET creates major cost savings for the users.

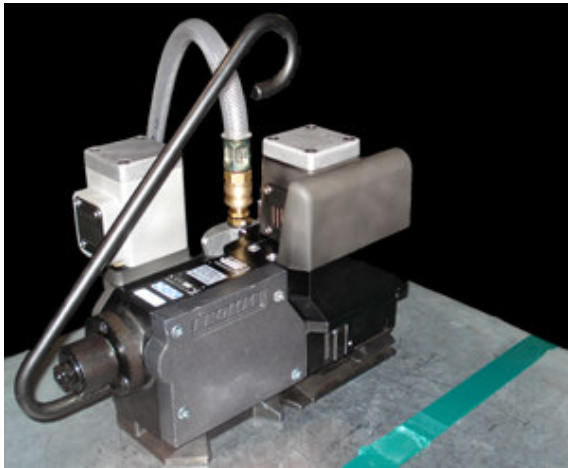

#### Advantages:

- High tension force up to 7000 N / 1570 lbs
- Ideal for heavy duty applications with strapping dimensions from 19 to 32 mm / 3/4 - 1 1/4"
- Suitable for continuous operation
- Pneumatically powered
- Very reliable and service friendly
- The strap tension can be adjusted individually
- The sealing time can be set individually
- High seal strength

#### Characteristics

Strapping qualities:

Strapping dimensions: widths  
thicknesses

Weight:

Dimension:

Average seal strength:

Strap tension:

Tensioning speed:

Max. air pressure:

#### P360

PET

19.0 - 32.0 mm / 3/4 - 1 1/4"

0.40 - 1.53 mm / .016 - .060"

18.5 kg / 40.8 lbs (including suspension bracket)

L490 x W166 x H338 mm / 19.3" x 6.5" x 13.3"


up to 75 % (dependent on strap quality)

2200 - 4000 N / 495 - 900 lbs (adjustable) or

3800 - 7000 N / 855 - 1570 lbs (adjustable)

270 mm/s / 10.6 inch/s or 150 mm/s / 5.9 inch/s

6.0 bar / 87 psi

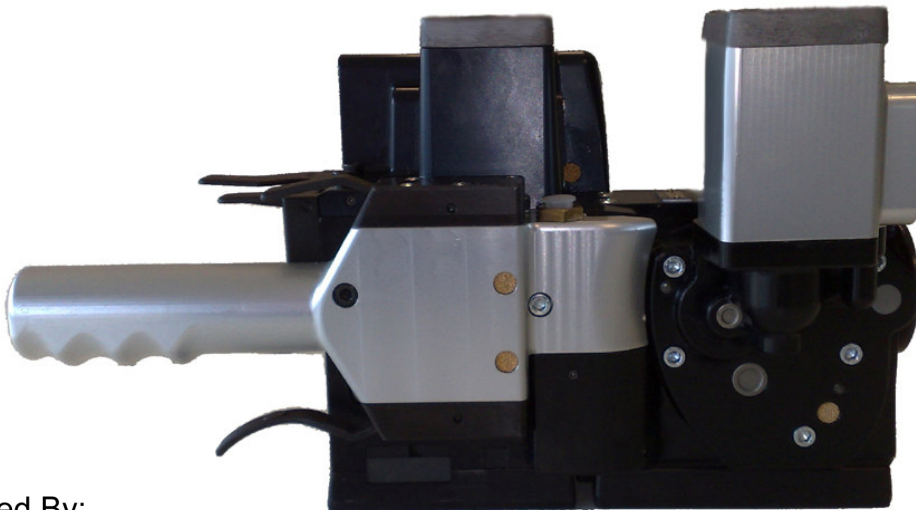

Distributed By:

**Allstrap**

1719 Kenny Rd  
Columbus, OH, 43212

[www.fromm-pack.com](http://www.fromm-pack.com)